

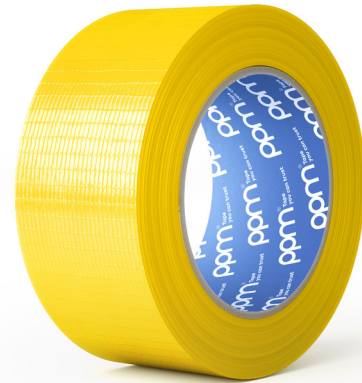
**Technical Data Sheet**

Date of Issue 11/10/2016

Rev. 01\_13/07/2018

# 9062

## Professional Grade Duct Tape

**Product Description**

Professional grade, PE laminated synthetic cloth duct tape, coated with a semi-permanent synthetic rubber – resin solvent free adhesive. Its adhesive formulation resists at low temperature with excellent bonding to multiple rough and smooth surfaces, especially PE and plastic sheeting. It is suitable for high demand contractor applications and specifically designed for sealing and jointing operations in asbestos abatement. For clean removal, long-term UV exposure not recommended.

**Features**

- Easy tear
- Excellent adhesion to PE
- Good holding power on PE
- Low temperature resistance
- Excellent conformability
- Suitable for multiple surfaces
- Perfectly waterproof

**Main Applications**

- Jointing and sealing asbestos abatement and agriculture
- General repair in construction sites
- Masking in Wall plastering
- Pipe wrapping and duct seaming
- Double glazing unit sealing

**Technical Data**

	Metric	Imperial Units	Test Method
Total weight*	153 g/m <sup>2</sup>	153 g/m <sup>2</sup>	ISO 536
Total thickness*	165 µm	6.5 mils	AFERA 5006/PSTC 133
MD tensile strength*	33 N/cm	18.8 Lbs/in	AFERA 5004/PSTC 131
MD elongation at break*	20 %	20 %	AFERA 5004/PSTC 131
Adhesion to steel plate*	9 N/cm	82.2 oz/in	AFERA 5001/PSTC 101
Service temperature	-10°C / 60°C	14°F / 140°F	

**Backing material**

PE laminated synthetic cloth

**Type of adhesive**

Synthetic rubber resin - solvent free

\*Typical value

**Available colour****Technical Information and Product Use**

All technical information and data above mentioned are provided to the best of our knowledge on the basis of our practical experience. Figures shown refer to average values only, based on tests carried out in conditioned laboratory and are not valid for specification. The company reserves the right to modify or change the products at any time without notice. The accuracy or completeness of such information is not guaranteed. The technical information, suggestions and other statements contained in this document have been compiled for your guidance and usage. PPM Industries reminds the user of the products to make sure that the product is used as per the instructions and suggestions provided. It is the user's sole responsibility to determine the suitability of the product in actual application under specific conditions.

**Storage and Shelf Life**

Suggested storage in dry area away from direct sunlight temperature should range from 59°F / 15°C to 77°F / 25°C with max relative humidity of 50%. Tape and jumbo roll should be used respectively within 12 months and 6 months from date of manufacture. PPM Industries does not take responsibility for the defective material if is not stored and used in accordance with the conditions listed above.